


### UV Protection

Vivak A22 Sheet is a transparent copolyester product that can be used to help protect merchandise, pictures and artwork by decreasing the transmission of harmful UV light. This product is easily decorated by painting, silk screening or hot stamping.

### Applications

Poster and photo frames, shelving, greeting card displays, revolving merchandise racks, indoor signs, point of purchase displays, menu boards and slatwall fixtures.

Typical Properties			
Properties	Test Method	Units	Values
<b>PHYSICAL</b>			
Specific Gravity	ASTM D792	-	1.27
Water Absorption, 24 hours	ASTM D570	%	0.2
Light Transmission	ASTM D1003	%	86
Refractive Index	ASTM D542	-	1.57
Haze	ASTM D1003	%	1.0
<b>MECHANICAL</b>			
Tensile Strength, Ultimate	ASTM D638		7,700
Tensile Modulus	ASTM D638	psi	320,300
Flexural Strength	ASTM D790	psi	11,200
Flexural Modulus	ASTM D790	psi	310,000
Shear Strength	ASTM D732	psi	9,000
Compressive Strength	ASTM D895	psi	8,000
Izod Impact Notched 0.125" @ 73 °F	ASTM D256	ft-lb/in	1.7
Izod Impact Notched 0.125" @ 32 °F	ASTM D256	ft-lb/in	1.2
Drop Dart Impact 0.250"	ASTM D3763	ft-lb/in	83
Rockwell Hardness	ASTM D785	R Scale	115
<b>THERMAL</b>			
Heat Deflection Temperature, @ 264 psi	ASTM D648	°F	150
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.8 x 10 <sup>-5</sup>
Glass Transition Temperature	ASTM D3418	°F	178
<b>ELECTRICAL</b>			
Dielectric Constant @ 1kHz	ASTM D150	-	2.6
Dielectric Constant @ 1mHz	ASTM D150	-	2.4
Dielectric Strength	ASTM D149	V/mil	410

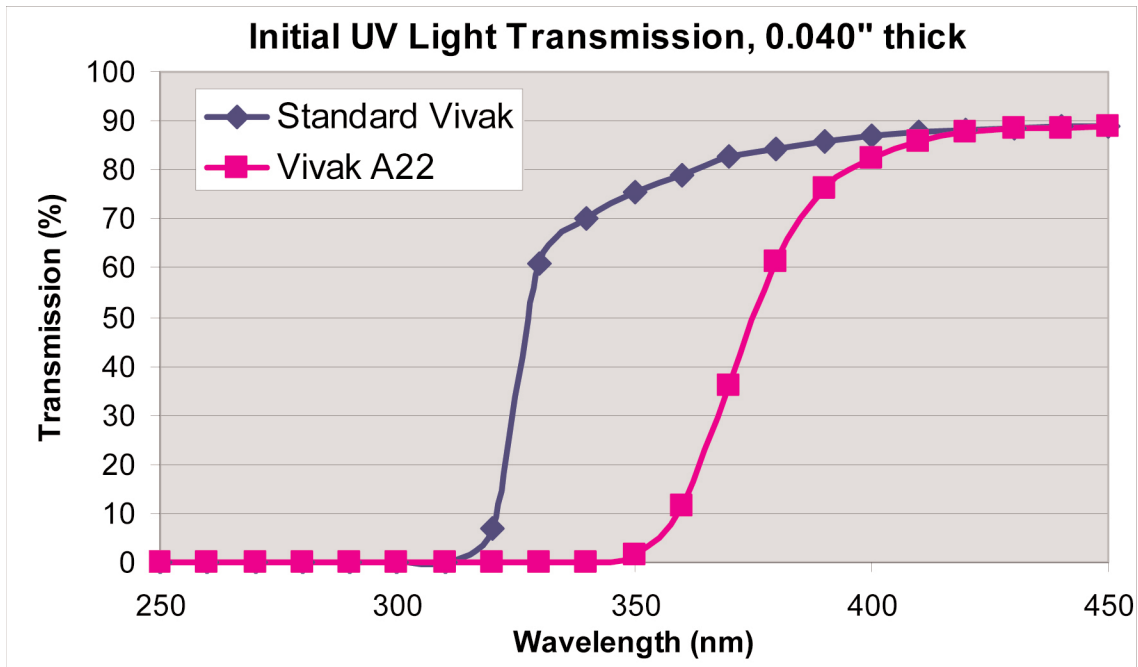

**Disclaimer**

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

## Sheffield Plastics Inc.

A  Bayer MaterialScience Company

119 Salisbury Road  
 Sheffield, MA 01257  
 800-254-1707  
 FAX: 800-457-3553  
 Website: [sheffieldplastics.com](http://sheffieldplastics.com)  
 E-mail: [info@sheffieldplastics.com](mailto:info@sheffieldplastics.com)

